

COMPACT SERIES

extreme lightweight
loudspeaker system

 **Trevis**
audio lab



www.trevisaudio.com
hotline@trevisaudio.com



COMPACT SERIES TA-08

extreme lightweight
fullrange loudspeaker

Trevis
audio lab

SYSTEM SPECIFICATIONS

Frequency Response ¹	68Hz-19kHz ±3dB (45 Hz - 19 kHz ±3dB with TA-15S Subwoofer)
Usable Frequency Range (-6dB) ¹	62Hz - 20kHz (40 Hz - 20 kHz with TP-S115 Subwoofer)
Sensitivity 1W @ 1m ²	96 dB SPL Nominal, 94 dB SPL Wideband
Nominal Peak SPL @ 1m ²	125 dB SPL
HF Dispersion	90° Horizontal x 60° Vertical, rotatable horn
Crossover Frequency ³	2200 Hz passive, with HF protection
Nominal Impedance	8 Ohm
Recommended Amplifiers ⁴	Trevis Audio TAD1004, TAD1504

PRODUCT FEATURES

Components: Low Frequency	1 x 8" Neodymium motor 8 Ohm driver 2" (51 mm) voice coil
High Frequency	1 x 1" throat compression driver + low distortion CD horn 1.4" (36 mm) voice coil, Mylar diaphragm, Ferrofluid™ cooling
Connectors	2 x Neutrik SPEAKON™ 4 pole
Construction	Special extreme lightweight plywood cabinet with bracing
Height x Width x Depth	410 x 250 x 280 [mm]
Weight	7.5 kg
Handle	Integral, on top of the cabinet
Cabinet Finish	Textured durable black polyurethane coating
Front finish	AcuFoam™ on perforated steel grille
Stand fittings	Built in Stand Fitting, 35mm (1 3/8"), 12xM8 flying points

PRODUCT FEATURES

High power systems with 8", 10" and 12" LF and 1" HF drivers.

Ferrofluid® cooled HF drivers with self resettable overload protection.

Rotatable 90°x60° constant directivity horn and unique cabinet architecture ensure versatility; user adaptable for both PA and stage monitoring applications.

Two-way passive 8 Ohm design uses a single amplifier channel for simple installation and lower cost.



Supported with stand mounting and 12 M8 flying points for threaded eye-bolts or brackets.

TA-08 SYSTEM APPLICATIONS

Near-field touring, installed PA for clubs, A/V, theater, broadcast, etc.

High quality stage monitoring for clubs, A/V, theater, broadcast, etc.

Fill-in system in conjunction with larger Trevis Audio systems.

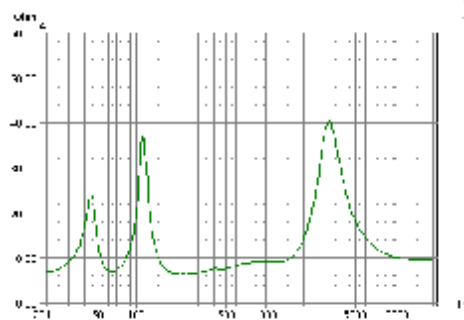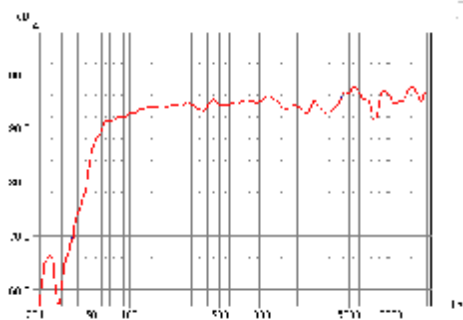

[1] Response curves & data : Anechoic Far Field for the TA loudspeakers with system EQ. Half-Space Anechoic radiation for the TA-S speakers with system EQ.

[2] Sensitivity & Peak SPL data. Measured with band limited Pink Noise (6dB crest factor). Nominal refers to Voice Decade (300 Hz - 3 kHz), Wideband to the specified ±3dB range. Data are for speaker + processor + recommended amplifier combinations (500Wrms to 8 Ohms).

[3] Acoustical crossover frequency - at this frequency, the transducers produce equal sound pressure levels.

[4] Any other clip-limited power amplifiers can be used which can deliver 200 to 500 Watts into 8 Ohms for 1xTA-08, 400 to 1000 Watts to 4 Ohms for 2xTA-08

www.trevisaudio.com
hotline@trevisaudio.com



COMPACT SERIES TA-10

extreme lightweight
fullrange loudspeaker

Trevis
audio lab

SYSTEM SPECIFICATIONS

Frequency Response ¹	65Hz-19kHz ±3dB (45 Hz - 19 kHz ±3dB with TA-15S Subwoofer)
Usable Frequency Range (-6dB) ¹	60Hz - 20kHz (40 Hz - 20 kHz with TP-S115 Subwoofer)
Sensitivity 1W @ 1m ²	98 dB SPL Nominal, 96 dB SPL Wideband
Nominal Peak SPL @ 1m ²	127 dB SPL
HF Dispersion	90° Horizontal x 60° Vertical, rotatable horn
Crossover Frequency ³	2100 Hz passive, with HF protection
Nominal Impedance	8 Ohm
Recommended Amplifiers ⁴	Trevis Audio TAD1004, TAD1504

PRODUCT FEATURES

Components: Low Frequency	1 x 10" Neodymium motor 8 Ohm driver 2.5" (64 mm) voice coil
High Frequency	1 x 1" throat compression driver + low distortion CD horn 1.4" (36 mm) voice coil, Mylar diaphragm, Ferrofluid™ cooling
Connectors	2 x Neutrik SPEAKON™ 4 pole
Construction	Special extreme lightweight plywood cabinet with bracing
Height x Width x Depth	470 x 310 x 320 [mm]
Weight	9 kg
Handle	Integral, on top of the cabinet
Cabinet Finish	Textured durable black polyurethane coating
Front finish	AcuFoam™ on perforated steel grille
Stand fittings	Built in Stand Fitting, 35mm (1 3/8"), 12xM8 flying points

PRODUCT FEATURES

High power systems with 8", 10" and 12" LF and 1" HF drivers.

Ferrofluid® cooled HF drivers with self resettable overload protection.

Rotatable 90°x60° constant directivity horn and unique cabinet architecture ensure versatility; user adaptable for both PA and stage monitoring applications.

Two-way passive 8 Ohm design uses a single amplifier channel for simple installation and lower cost.


Supported with stand mounting and 12 M8 flying points for threaded eye-bolts or brackets.

TA-10 SYSTEM APPLICATIONS

Near-field touring, installed PA for clubs, A/V, theater, broadcast, etc.

High quality stage monitoring for clubs, A/V, theater, broadcast, etc.

Fill-in system in conjunction with larger Trevis Audio systems.

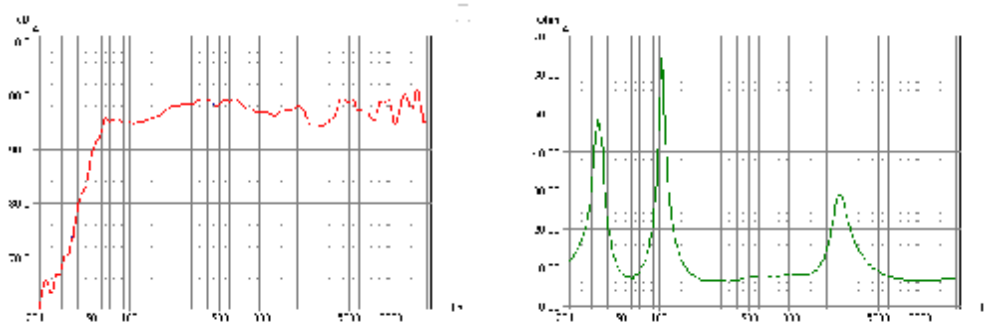

[1] Response curves & data : Anechoic Far Field for the TA loudspeakers with system EQ. Half-Space Anechoic radiation for the TA-S speakers with system EQ.

[2] Sensitivity & Peak SPL data. Measured with band limited Pink Noise (6dB crest factor). Nominal refers to Voice Decade (300 Hz - 3 kHz), Wideband to the specified ±3dB range. Data are for speaker + processor + recommended amplifier combinations (500Wrms to 8 Ohms).

[3] Acoustical crossover frequency - at this frequency, the transducers produce equal sound pressure levels.

[4] Any other clip-limited power amplifiers can be used which can deliver 200 to 500 Watts into 8 Ohms for 1xTA-10, 400 to 1000 Watts to 4 Ohms for 2xTA-10

www.trevisaudio.com
hotline@trevisaudio.com



COMPACT SERIES TA-12

extreme lightweight
fullrange loudspeaker

Trevis
audio lab

SYSTEM SPECIFICATIONS

Frequency Response ¹	62Hz-20kHz ±3dB (45 Hz - 20 kHz ±3dB with TA-15S Subwoofer)
Usable Frequency Range (-6dB) ¹	58Hz - 21kHz (40 Hz - 21 kHz with TP-S115 Subwoofer)
Sensitivity 1W @ 1m ²	99 dB SPL Nominal, 97.5 dB SPL Wideband
Nominal Peak SPL @ 1m ²	129 dB SPL
HF Dispersion	90° Horizontal x 60° Vertical, rotatable horn
Crossover Frequency ³	1700 Hz passive, with HF protection
Nominal Impedance	8 Ohm
Recommended Amplifiers ⁴	Trevis Audio TAD1004, TAD1504

PRODUCT FEATURES

Components: Low Frequency	1 x 12" Neodymium motor 8 Ohm driver 2.5" (64 mm) voice coil
High Frequency	1 x 1" throat compression driver + low distortion CD horn 1.7" (44 mm) voice coil, polyimide diaphragm, Ferrofluid™ cooling
Connectors	2 x Neutrik SPEAKON™ 4 pole
Construction	Special extreme lightweight plywood cabinet with bracing
Height x Width x Depth	560 x 400 x 360 [mm]
Weight	10.5 kg
Handle	Integral, on top of the cabinet
Cabinet Finish	Textured durable black polyurethane coating
Front finish	AcuFoam™ on perforated steel grille
Stand fittings	Built in Stand Fitting, 35mm (1 3/8"), 12xM8 flying points

PRODUCT FEATURES

High power systems with 8", 10" and 12" LF and 1" HF drivers.

Ferrofluid® cooled HF drivers with self resettable overload protection.

Rotatable 90°x60° constant directivity horn and unique cabinet architecture ensure versatility; user adaptable for both PA and stage monitoring applications.

Two-way passive 8 Ohm design uses a single amplifier channel for simple installation and lower cost.


Supported with stand mounting and 12 M8 flying points for threaded eye-bolts or brackets.

TA-12 SYSTEM APPLICATIONS

Near-field touring, installed PA for clubs, A/V, theater, broadcast, etc.

High quality stage monitoring for clubs, A/V, theater, broadcast, etc.

Fill-in system in conjunction with larger Trevis Audio systems.

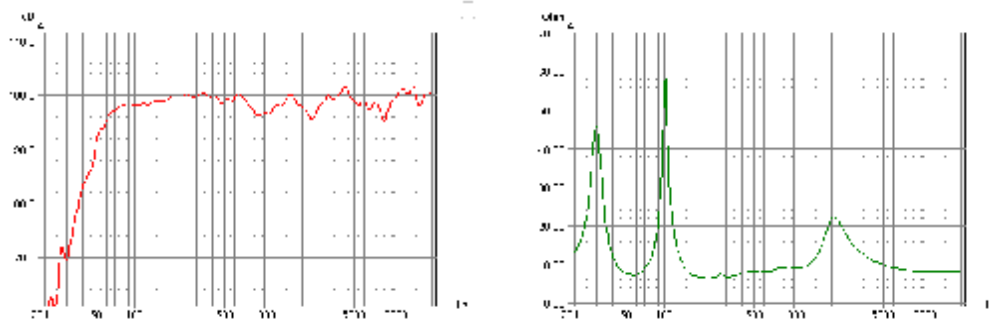

[1] Response curves & data : Anechoic Far Field for the TA loudspeakers with system EQ. Half-Space Anechoic radiation for the TA-S speakers with system EQ.

[2] Sensitivity & Peak SPL data. Measured with band limited Pink Noise (6dB crest factor). Nominal refers to Voice Decade (300 Hz - 3 kHz), Wideband to the specified ±3dB range. Data are for speaker + processor + recommended amplifier combinations (500Wrms to 8 Ohms).

[3] Acoustical crossover frequency - at this frequency, the transducers produce equal sound pressure levels.

[4] Any other clip-limited power amplifiers can be used which can deliver 200 to 500 Watts into 8 Ohms for 1xTA-12, 400 to 1000 Watts to 4 Ohms for 2xTA-12

www.trevisaudio.com
hotline@trevisaudio.com



COMPACT SERIES TA-15

extreme lightweight
fullrange loudspeaker

Trevis
audio lab

SYSTEM SPECIFICATIONS

Frequency Response ¹	58Hz-19kHz ±3dB (35 Hz - 19kHz ±3dB with TA-18S Subwoofer)
Usable Frequency Range (-6dB) ¹	55Hz - 20kHz (35 Hz - 20 kHz with TP-S118 Subwoofer)
Sensitivity 1W @ 1m ²	99.5 dB SPL Nominal, 98 dB SPL Wideband
Nominal Peak SPL @ 1m ²	132 dB SPL
HF Dispersion	90° Horizontal x 40° Vertical, rotatable horn
Crossover Frequency ³	1300 Hz passive, with HF protection
Nominal Impedance	8 Ohm
Recommended Amplifiers ⁴	Trevis Audio TAD1504, TAD2008

PRODUCT FEATURES

Components: Low Frequency	1 x 15" Neodymium motor 8 Ohm driver 3" (76 mm) voice coil
High Frequency	1 x 1.4" throat compression driver + low distortion CD horn 2.5" (65 mm) voice coil, Titanium diaphragm
Connectors	2 x Neutrik SPEAKON™ 4 pole
Construction	Special extreme lightweight plywood cabinet with bracing
Height x Width x Depth	680 x 430 x 395 [mm]
Weight	17 kg
Handle	Integral, on top and on both sides of the cabinet
Cabinet Finish	Textured durable black polyurethane coating
Front finish	AcuFoam™ on perforated steel grille
Stand fittings	Built in Stand Fitting, 35mm (1 3/8), 12xM8 flying points

PRODUCT FEATURES

High power full-range loudspeaker with 15" woofer and 1.4" HF driver.

Rotatable 90°x40° constant directivity horn and unique cabinet architecture ensure versatility; user adaptable for both PA and stage monitoring applications.

Two-way passive 8 Ohm design uses a single amplifier channel for simpler installation and lower cost.



Supported with stand mounting and 12 M8 flying points for threaded eye-bolts or brackets.

TA-15 SYSTEM APPLICATIONS

Near-field touring, installed PA for clubs, A/V, theater, broadcast, etc.

High quality, high power stage monitoring for clubs, A/V, theater, broadcast, etc.

Fill-in system in conjunction with larger Trevis Audio systems.

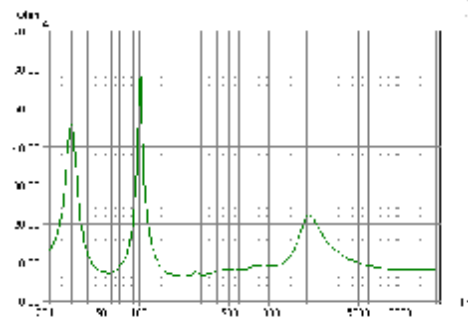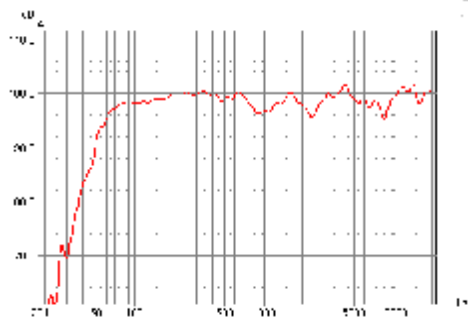

[1] Response curves & data : Anechoic Far Field for the TA loudspeakers with system EQ. Half-Space Anechoic radiation for the TA-S speakers with system EQ.

[2] Sensitivity & Peak SPL data. Measured with band limited Pink Noise (6dB crest factor). Nominal refers to Voice Decade (300 Hz - 3 kHz), Wideband to the specified ±3dB range. Data are for speaker + processor + recommended amplifier combinations (700Wrms to 8 Ohms).

[3] Acoustical crossover frequency - at this frequency, the transducers produce equal sound pressure levels.

[4] Any other clip-limited power amplifiers can be used which can deliver 350 to 800 Watts into 8 Ohms for 1xTA-15, 700 to 1600 Watts to 4 Ohms for 2xTA-15

www.trevisaudio.com
headline@trevisaudio.com



COMPACT SERIES TA-15S

extreme lightweight
Subbass extension for
COMPACT speakers



Trevis
audio lab

SYSTEM SPECIFICATIONS

Frequency Response ¹	45 Hz - 2000 Hz ±3dB
Usable Frequency Range (-6dB) ¹	40 Hz - 2000 Hz
Sensitivity 1W @ 1m ²	97 dB SPL
Nominal Peak SPL @ 1m ²	129 dB SPL
Crossover Frequency	250 Hz passive (can be bypassed with switch on connector panel)
Crossover Output	250 Hz passive highpass-filter (see system operation)
Nominal Impedance	8 Ohm
Recommended Amplifiers ³	Trevis Audio TAD 2008

PRODUCT FEATURES

Components: Low Frequency	1 x 15" Neodymium motor 8 Ohm driver 3" (76 mm) voice coil
Connectors	2 x Neutrik SPEAKON™ 4 pole
System Operation	2+, 2- terminal on 4 pole SPEAKON™ is the passive high-pass filtered output for TA full-range loudspeakers to combine TA-15S and TA-08 (or TA-10) speakers as a passive satellite system, which can be easily driven from a single amplifier channel giving the user a very simple and cost effective way to create a high quality extended range loudspeaker system
Construction	Special extreme lightweight plywood cabinet with bracing
Height x Width x Depth	640 x 430 x 540 [mm]
Weight	17 kg
Handle	Integral, on both sides of the cabinet
Cabinet Finish	Textured durable black polyurethane coating
Front finish	AcuFoam™ on perforated steel grille
Stand fittings	Built in Stand Fitting on top, 35mm (1 3/8), flying points (optional)

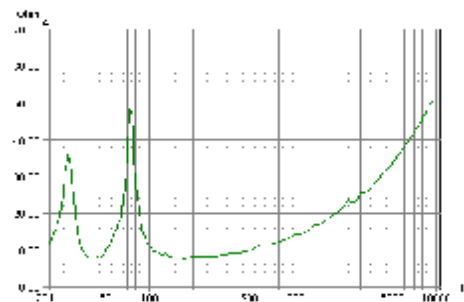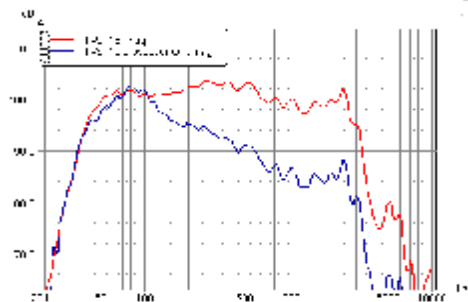

[1] Response curves & data : Anechoic Far Field for the TA loudspeakers with system EQ. Half-Space Anechoic radiation for the TA-S speakers with system EQ.

[2] Sensitivity & Peak SPL data. Measured with band limited Pink Noise (6dB crest factor). Data are for speaker + processor + recommended amplifier combinations (700 Wrms to 8 Ohms).

[3] Any other clip-limited power amplifiers can be used which can deliver 500 to 800 Watts into 8 Ohms for 1xTA-15S, 1000 to 1600 Watts to 4 Ohms for 2xTA-15S

PRODUCT FEATURES

- High power bass extension with 15" LF driver for TA range speakers.

- Easy set up and cabling

- Built in bypassable passive low-pass filter and passive high-passed output for TA-08 or TA-10 speakers

- Supported with stand mounting and optional flying accessories.

TA-15S SYSTEM APPLICATIONS

- High power touring, installed PA for clubs, A/V, theater, broadcast, etc.

- High quality, high power stage monitoring for clubs, A/V, theater, broadcast, etc.

- Fill-in system in conjunction with larger Trevis Audio systems.

www.trevisaudio.com
hotline@trevisaudio.com



COMPACT SERIES TA-18S

extreme lightweight
Subbass extension for
COMPACT speakers

Trevis
audio lab

SYSTEM SPECIFICATIONS

Frequency Response ¹	38 Hz - 1000 Hz ±3dB
Usable Frequency Range (-6dB) ¹	35 Hz - 1000 Hz
Sensitivity 1W @ 1m ²	98 dB SPL
Nominal Peak SPL @ 1m ²	132 dB SPL
Recommended Crossover Freq.	100Hz - 150Hz
Crossover Output	-
Nominal Impedance	8 Ohm
Recommended Amplifiers ³	Trevis Audio TAD 2008, TAD1504 (-bridged mono operation)

PRODUCT FEATURES



Components: Low Frequency	1 x 18" Neodymium motor 8 Ohm driver 4" (102 mm) voice coil
Connectors	2 x Neutrik SPEAKON™ 4 pole
Construction	Special extreme lightweight plywood cabinet with bracing
Height x Width x Depth	700 x 510 x 630 [mm]
Weight	26 kg
Handle	Integral, on both sides of the cabinet
Cabinet Finish	Textured durable black polyurethane coating
Front finish	AcuFoam™ on perforated steel grille
Stand fittings	Built in Stand Fitting on top, 35mm (1"3/8), flying points (optional)

PRODUCT FEATURES

- High power sub-bass extension with 18" LF driver for TA range speakers.
- Supported with stand mounting and optional flying accessories.

TA-115S SYSTEM APPLICATIONS

- High power touring, installed PA for clubs, A/V, theater, broadcast, etc.
- High quality, high power stage monitoring for clubs, A/V, theater, broadcast, etc.

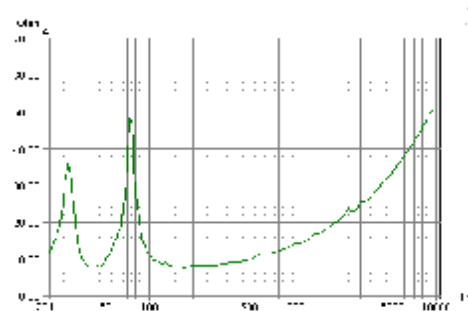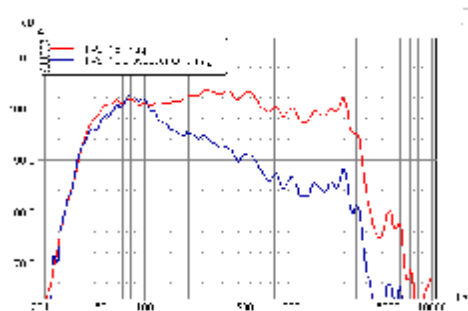

[1] Response curves & data : Anechoic Far Field for the TA loudspeakers with system EQ. Half-Space Anechoic radiation for the TA-S speakers with system EQ.

[2] Sensitivity & Peak SPL data. Measured with band limited Pink Noise (6dB crest factor). Data are for speaker + processor + recommended amplifier combinations (1500 Wrms to 8 Ohms).

[3] Any other clip-limited power amplifiers can be used which can deliver 800 to 1500 Watts into 8 Ohms for 1xTA18S, 1600 to 3000 Watts to 4 Ohms for 2xTA-18S